



FÜR HANDWERK, DAS ÜBERZEUGT.

# BLANKE BASEMAX


Level surfaces - fast and easy



PHOTO SOURCE: FLIESEN STELLER

[blanke-systems.com](http://blanke-systems.com)

## EASY LEVELLING – FROM 5 TO 100 MM!

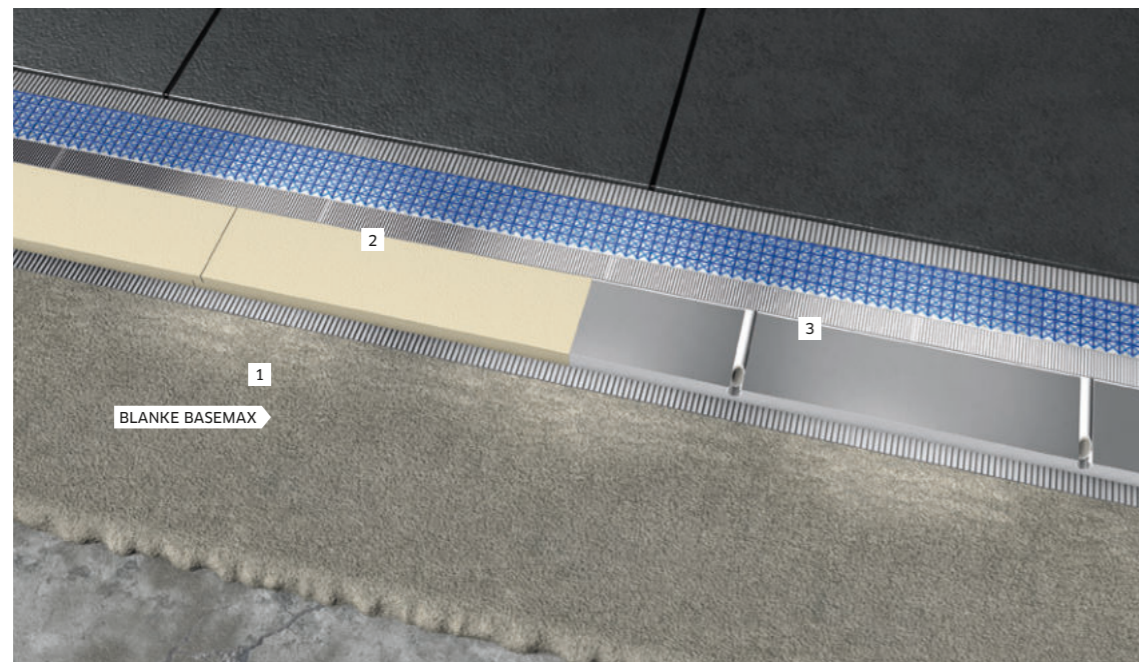

1 BLANKE BASEMAX 2 BLANKE PERMATFLOOR 3 BLANKE PERMATOP

### LEVEL SURFACES – FAST AND EASY

- > Low static load due to light weight - only about 25% the weight of conventional screed
- > Economical through a high proportion of light materials
- > Two-component system creates a permanent, fixed adhesion
- > High time savings - quick drying and installation ready after 12 hours
- > Levels surfaces from just 5 mm up to 100 mm

BLANKE BASEMAX consists of a light filler in the form of expanded glass granulate and a cement-based bonding agent. Mixing with water creates the easy levelling from the two components which binds with the uneven surfaces - no matter whether concrete, screed, chipboard or wood flooring - it can be levelled from just 5 mm right up to 100 mm. BLANKE BASEMAX distinguishes itself through its extreme low weight properties, which only accounts to 25% of a comparable conventional screed. After just 12 hours, BLANKE BASEMAX is set and the Blanke flooring systems can be directly bonded and installed.



Easy incorporation of pipes and cables



1 Before starting, lay out tools and material



2 Priming



3 Application of the mixed adhesion bridge



4 Spread the mixed BLANKE BASEMAX wet in wet



5 Compress and trowel up



6 Smooth. Ready for installation after 12 hours

### TECHNICAL DATA

Mixing ratio:	1 part by weight: 1 part by weight, Comp. A bonding agent, comp. B filler, 1 bag comp. A 25 kg, 2 bags comp. B 12.5 kg
Water needed:	approx. 35 % = 8.75 l water per 25 kg bonding agent
Layer thickness:	min 5 mm - max. 100 mm
Working time:	approx. 60 min.
Accessible:	approx. 12 hrs
Ready for laying:	approx. 12 hrs
Consumption:	approx.a 4.8 kg/m <sup>2</sup> per cm thickness, ready mix comp. A+B
Storage life:	approx. 6 months

For more information, please refer to the technical data sheet and laying instructions.



Consulting and Sales:

Blanke GmbH & Co. KG  
Stenglingser Weg 68-76  
58642 Iserlohn / Germany  
T +49 (0)2374 507-0  
F +49 (0)2374 507-4230  
E info@blanke-systems.de  
I www.blanke-systems.de

FACHVERBAND  
FLIESEN  
UND NATURSTEIN



im Zentralverband des Deutschen Baugewerbes



DRUBE0042